

H.B

H.BOAG FLOOR BOX



Stylish
Flexible
Durable

Description-3 Compartment Raised Floor Box 产品说明 - 标准三格地台箱

H.Boag's floor boxes range is a unique, stylish and robust unit designed to give quick and simple solutions to raised access floor installations. H.Boag's 3 compartment raised floor boxes is flexible enough to accommodate most situations, however H.Boag will investigate any special requirements.

和普地台箱系列设计时尚独特，灵活和坚固耐用，可提供快捷简单的方案给地台板装置。也可根据客户的特别需要而设计。

General Features 设计特色

- Overall dimensions 310 x 216 x 85mm
 - Panel cut out 300 x 200mm
 - Min plug space 30mm
 - Socket space 39mm
 - 2 cable exit flaps providing 60 x 15mm openings
 - Reversible lid / trim assembly manufactured from flame retardant ABS
 - Integral moulded lifting handle
 - 4 unique relocatable spring fixing clips for quick fit
- 总尺寸310 x 216 x 85mm
 - 地台板切割300 x 200mm
 - 插线空间30mm
 - 制箱空间39mm
 - 出线口尺寸60 x 15mm
 - 胶面用ABS防火料制造
 - 组合式手柄
 - 四个独特的固定夹

Mounting Frame 镶嵌框架


The mounting frame is manufactured from galvanized steel and is suitable for mounting into a 300 x 200 mm hole cut into any access floor panel. The frame is provided with four spring clips with firmly anchor the frame into the floor panel.

镶嵌框架是由镀锌铁制成，适合镶嵌于任何一块300x 200mm已开孔的地台板之内。框架是由四个独特的固定夹稳固地与地台板系在一起。

Box Base 地台箱底部

The box base is manufactured from galvanized steel and is provided with 20 and 25mm knockouts on all four sides. Dividing fillets are provided to separate the internal services. To ensure maximum security for the electrical services, the accessory plate fixing screws are located in an inaccessible position. Available spaces under accessory plates are 39mm.

地台箱底部是由镀锌铁制成，四边备有20mm和25mm的软喉孔，箱的内部装有铁片去分隔。为了使用时安全起见，制箱空间的固定螺丝钉是放在一个接触不到的位置，而制箱可用空间有39mm。

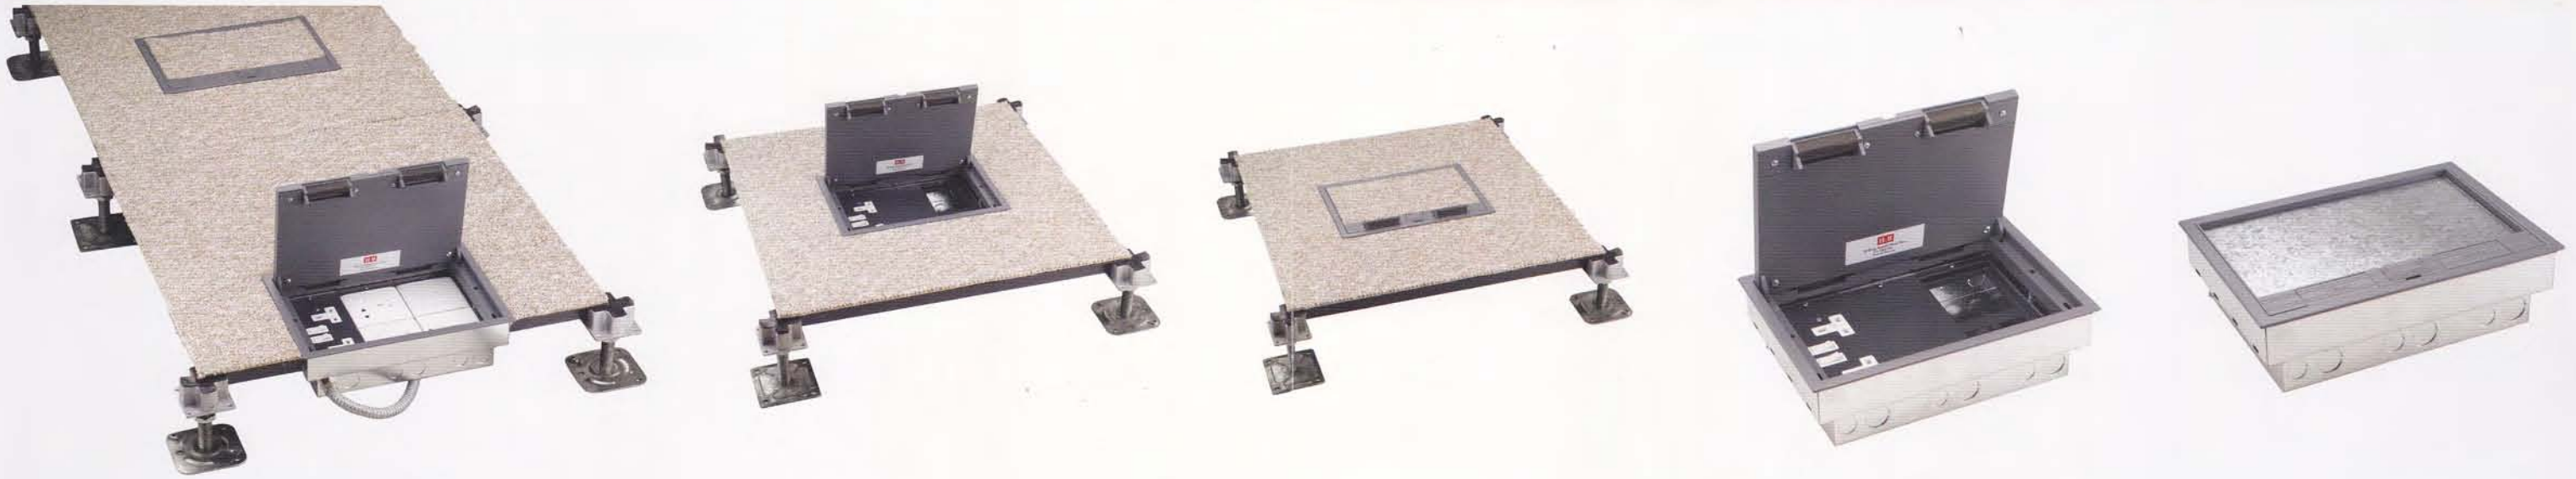


Lid Tray Assembly 面盖部份

The carpet trim and lid tray are moulded from flame retardant ABS, with both having a steel reinforced section to ensure maximum rigidity. Each lid is provided with two cable outlet brackets that are securely fixed into the lid tray, together with a moulded integral lid handle. The carpet trim and lid tray can be rotated through 180° to allow the lid to be opened in either direction. Available space above plates with lid closed is 30mm, and the standard colour of the moulding is dark grey.

面盖部份是由防火料ABS铸造而成，用钢铁去强化增加其坚硬度。每一块地台盖都是由两组出线口托架安全地固定于盖盘之内，而且加上组合式手柄。面盖更可以作180°转动，使地台盖可以由任何一个方向打开。地台盖合上之后有30mm的充裕空间，而地台箱的标准颜色为深灰色。

Accessory Plates 扩充配件



Item ID : HB2019
Twin Switched
13A Power Socket,
BS1363 Standard
编号 : HB2019
双开关13A电源插座
(符合BS1363标准)



Item ID : HK3347J
Standard Data and
Telephone Plate
编号 : HK3347J
标准式双位片适合电话
和数据使用
(也可以适合电源插座使用)



Item ID: HK3000
Blank Plate
编号 : HK3000
空白片



Item ID : D3004
Pierced Plate
for 4 x RJ45 /
LJ6C Modular
编号 : D3004
四位式数据片适合
RJ45和LJ6C模块

The supply of plates, other than those shown may be available upon request. Plates are interchangeable within the box. Non-standard, clean earth or coloured sockets are available to order. 其它没有列出的配件或者是内地用的10A电源插座，可以按客户的需求而定制。

Installation Instruction 安装指引



Removing the lid

: Open the lid to the correct angle, and pull free from the frame.

Refitting the lid

: Insert the lid in the frame at the correct angle and push. The lid automatically sits in the frame correctly.

Reverse lid

: You can reverse the lid in order to accommodate for furniture repositioning, without re-installing the full box.

打开地台盖

: 打开地台盖至适当的角度，然后将之由框架拉出。

重新盖上地台盖

: 将地台盖插入框架内至适当的角度并向内推，地台盖会自动正确地盖在框架上。

翻转地台盖

: 改变家具的位置时，地台盖可以翻转来迎合家具的位置，并不需要将整个地台箱重新安装。



Removing the trim

: The trim is held in place by two screws. To remove the trim, simply unscrew both screws. These screws also allow you to level the trim in an uneven floor.

打开内部

: 地台箱内部是用两口螺丝钉固定的。要除去时，只需要松开螺丝便可。这两口螺丝容许地台箱安装在不平坦的地面上也变得平稳。



Cable outlet brackets

: Cable outlet brackets remain in the closed position EXCEPT when there is a cable in the box, at which point they will automatically open to prevent damage to the cable.

Cable guides

: Cables should be installed into the cable guides. These can also be reversed should you decide to reverse the lid.

出线口托架

: 出线口托架平常是关上的，但当地台箱内有电线时，出线口会自动开启，避免电线受到破坏。

电线引导

: 电线一定要安装在引导内，当地台盖的方向翻转的时候，电线引导的方向也可随之翻转。